


USER'S MANUAL DE103

DIAGRAM & FUNCTION INDICATION

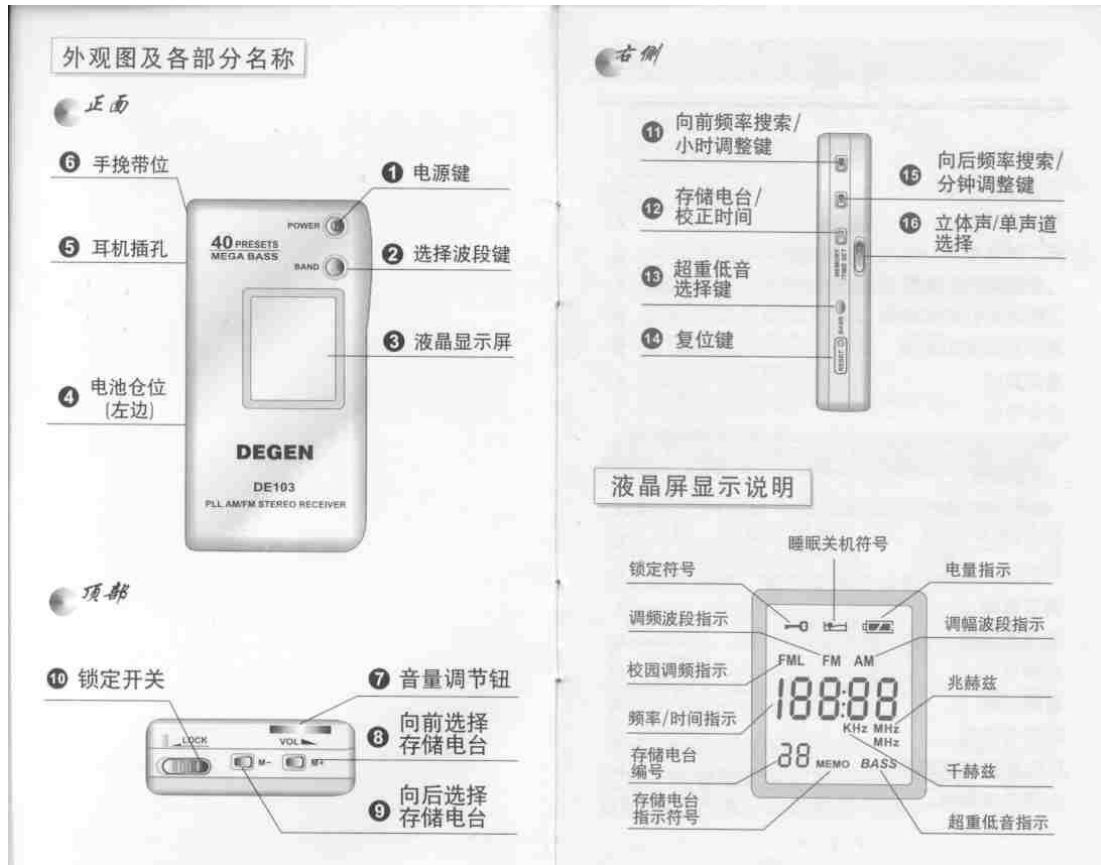

- | | |
|------------------------|---------------------------|
| 1. Power | 9. M- |
| 2. Band Selector | 10. Lock |
| 3. LCD Display | 11. Forward Search / Hr |
| 4. Battery Compartment | 12. Memory / Time Set |
| 5. Earphone Jack | 13. Superbass |
| 6. Hand Strap | 14. Reset |
| 7. Volume Control | 15. Backward Search / Min |
| 8. M+ | 16. Stereo / Mono Switch |

INSTALL BATTERY

The radio uses 1 AAA 1.5V batteries, please put the new batteries in the battery slot according to the polarity.

POWER ON/OFF

The unit has memory function. It will enter into the station the last time you turned it off.

1. Press the Power button (1) to the radio on or off.
2. Sleep function power off (see below)

SLEEP FUNCTION

Press and hold the Power button (1) and you will see the shut off time 100 , 90,20,10, OFF continuously. When you see the desired shut off time , release the button. The unit will turn off at the preset time. Please note that OFF means to exit the sleep function.

BAND SELECTION

Press the Band button (2) to select between AM , FM and FML .

SEARCH STATION

1. Manual Search – Press the Search buttons (+ 11 / -15) once at a time until you reach the right station.
2. Auto Search – Press the Search buttons for one second (+11 / -15) . Searching will stop if the radio receive strong signals.
3. Listen to preset Stations – Select the Band (2). Press M+ (8) or M- (9) to locate the desired station.

MEMORY PRESET

1. Find the desired frequency with manual or auto search.
2. Press the Memory button (12) for 2 seconds until it blinks. Press M+ (8) or M- (9) to select the channel to store.
3. Press the Memory button (12) again to confirm .

TIME SET

1. Under the clock mode, press and hold the Time Set button (12) . You will see the time blinks. Press

the Hr / + (11) button to set the hour and Min/ - (12) button to set the minute . Press the Time Set button (12) to confirm.

TECHNICAL INDEX

1. Frequency Range :
 - FM 87-108 MHz
 - FML 76-87 MHz
 - AM 531 - 1602 KHz
2. Memory Presets (40)
 - FM – 20
 - AM , FML (20 each)
3. Noise Limit Sensitivity
 - FM $\leq 10\mu\text{v}$
 - FM $\leq 15\mu\text{v}$
 - AM $\leq 2\text{mV/m}$
4. Single Signal Selectivity $\geq 20\text{dB}$
5. Power : 1 x AAA batteries
6. Unit Size : 78 x 40 x 15 mm
7. Weight : 42g (without battery)